


FIXTURE INSTALLATION INSTRUCTIONS

PULL-OUT SINGLE LEVER SHAMPOO FIXTURE w/BUILT-IN VACUUM BREAKER

IAPMO Certification ASME A112.18.1M-2000

ANSI/NSF 61-9 Approved

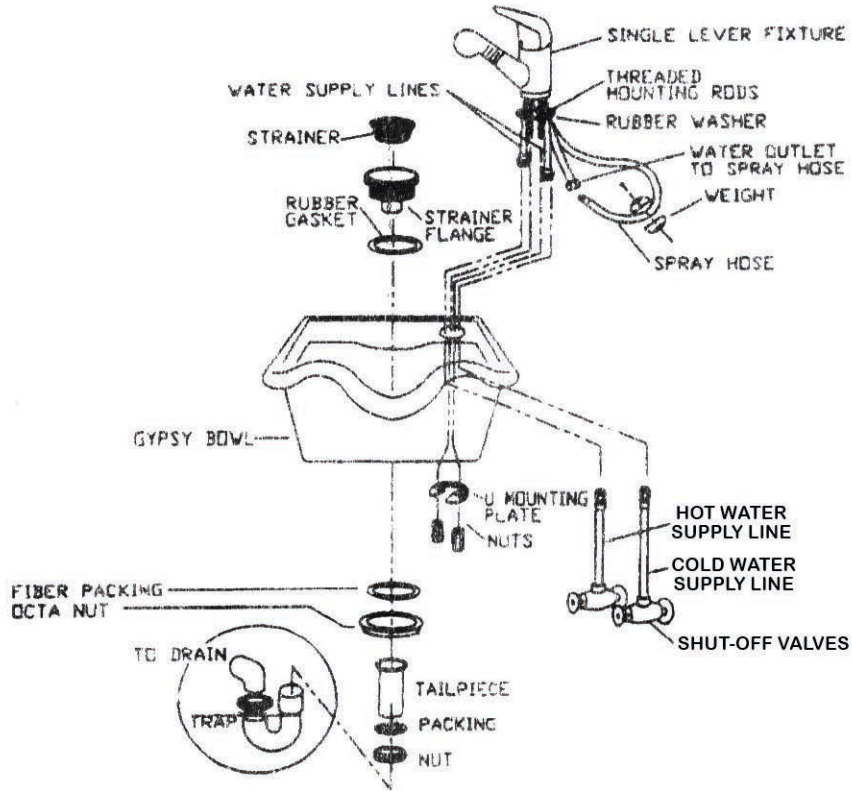

FAUCET INSTALLATION

Insert fixture through top of bowl with the rubber washer making contact with the bowl surface. Feed all hoses through hole in bowl.

From underneath slide u-mounting plate onto threaded mounting rods and fasten nuts to rods. Tighten nuts snug up against u-mounting plate.

Attach end of spray hose to the water supply outlet on the fixture.

Note:
Secure the single lever faucet hose to bowl prior to mounting.

Attach hot and cold water supply lines to the faucet.

Attach the weight to the spray hose near the bottom of the loop.

